

# model IP4.100.xxx



## Construction


- > Dimensions 4" length x 2" height x .75" width
- > UV resistant polycarbonate for durability
- > Integrated strain relief
- > Lifetime Limited Warranty
- > C/US UL Listed 1838 Low Voltage Landscape Lighting



## Electrical

- > Low voltage 12vAC operation
- > IP67 certified waterproof
- > Choice of energy consumption and color appearance (listed below)
- > 72" long 18/2 leads for connection
- > Magnetic or electronic transformer compatible
- > LED life expectancy up to 40,000 hours

## Dimensions

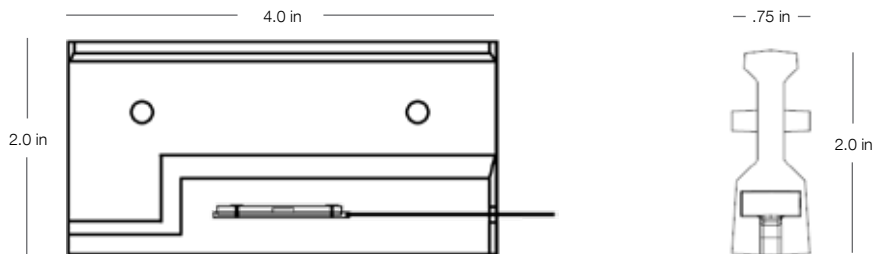

dimensions are approximate

## LED Color Outputs



IP4.100.550  
2400K ultrawarm white  
.25 watt energy consumption  
order model with suffix .550



IP4.100.500  
3000K pure white  
1 watt energy consumption  
order model with suffix .500

Please avoid using roller tamperers on pavelux® fixtures. Damage may occur if a roller tamperer is used upon installation.

